

FELLING TRAILERS

HYDRAULIC DUMP TRAILERS

DT, DT HD, DO DT, E SD



The **FELLING** Style
Quality ~ Craftsmanship ~ Pride




DT-103

Since 1974

DROP DECK *DUMP SERIES*

DT SERIES

- Load capacities ranging from 4,500 lbs. to 7,000 lbs.
- 10-gauge steel floor with 20" high 12-gauge sides
- Deck width: FT-6 DT 60" ID, FT-10 DT 80" ID
- Single hydraulic cylinder
- Double-acting spreader gate
- Tie downs - stake pockets
- Heavy-duty battery, pump, and remote with 15 ft. cord

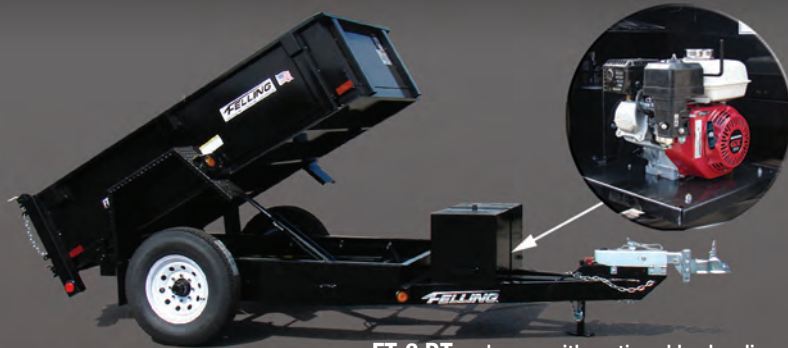

FT-6 DT - shown with optional hydraulic surge brakes & gas engine (in lieu of electric/hydraulic pump)

DT HD (HEAVY DUTY) SERIES

- Load capacities ranging from 12,000 lbs. to 16,000 lbs.
- 10 - gauge steel floor with 20" high 12 - gauge sides - FT-12 & 14 DT
- 7 - gauge steel floor with 20" high 10 gauge sides - FT-16 DT
- Deck width - 80" ID, 102" OD
- Heavy-duty TAFCO 10 - ton scissor hoist - FT-12 DT & FT-14 DT (12')
- Heavy-duty TAFCO 15 - ton scissor hoist - FT-14 DT (14' & 16') & FT-16 DT
- 5' 5" slide-out ramps with storage under deck
- Double rear swing-out doors
- Tie downs - stake pockets and D-rings
- Heavy-duty battery, pump, and remote with 15 ft. cord



FT-14 DT HD - standard slide-out ramps store under deck

DT SP (STATIONARY PLATFORM) OPTIONAL



FT-12 DT SP - shown with stationary platform with ramp and tarp system

The Stationary Platform Option can be selected on any of Felling's Hydraulic Dump Model Lines.

- Stationary deck: pressure treated wood
- Ramp - 48" long flip-up spring assist ramp

E SD (SIDE DUMP)



FT-14 E SD - shown with optional floor plate rear deck, spare wheel & tire mounted

- Load capacities ranging from 12,000 lbs. to 16,000 lbs.
- Dump box: 10-ga. steel floor with 16" high 12-ga. sides
- Rear deck: pressure treated wood w/split full width ramps
- Deck width - 80" ID
- Single hydraulic cylinder
- Double-acting spreader gate
- Tie downs - stake pockets & D-rings
- Heavy-duty battery, pump, and remote with 15 ft. cord

Spreader Gate with Landscape Gate (galvanized unit shown)



Double Rear Swing-out Gate



Double-Acting Spreader End Gate (STD on DT & DT-DO)



Grain Door with Shoot in End Gate



DECK OVER *DUMP SERIES*

DT DO SERIES

- Load capacities ranging from 12,000 lbs. to 16,000 lbs.
- 10 - gauge steel floor with 20" high 12 - gauge sides
- Deck width: 96" OD, 88" ID
- Heavy-duty TAFCO 10 - ton scissor hoist - FT-12-2 DT & FT-14-2 DT (12')
- Heavy-duty TAFCO 15 - ton scissor hoist - FT-14-2 DT (14' & 16') & FT-16-2 DT
- Double-acting spreader gate
- Tie downs - stake pockets
- Heavy-duty battery, pump, and remote with 15 ft. cord



FT-16-2 DT DO

DT DO (CONTRACTOR BODY) SERIES

- Load capacities ranging from 20,000 lbs. to 30,000 lbs.
- Contractor body with 14" high hinged, fold down sides
- 7 - gauge steel floor with 10 - gauge sides
- Deck width - 102" OD, 88" ID
- Heavy-duty TAFCO 20-ton scissor hoist
- 20" Double-acting spreader gate
- Tie downs - stake pockets
- Heavy-duty battery, pump, and remote with 15 ft. cord



FT-18-2 DT DO Contractor Body
standard fold down sides

DT DO (CONSTRUCTION BODY) SERIES

- Load capacities ranging from 12,000 lbs. to 30,000 lbs.
- 7 - gauge steel floor with 14" high 10 - gauge sides
- Optional side heights: 30", 36", and 48"
- Deck width - 98" OD, 92" ID
- Heavy-duty TAFCO 20-ton scissor hoist
FT-20-2 DT - FT-30-2 DT
- 20" Double-acting spreader gate
- Tie downs - stake pockets
- Heavy-duty battery, pump,
and remote with 15 ft. cord



FT-30-2 DT DO Construction Body - shown with
optional gooseneck coupler & tie rail around dump box


Double Rear Spreader Gate



Hydraulic Jack



Side Gate



Bolt on Tarp Kit with Aluminum Shroud



ALL ALUMINUM CONSTRUCTION & HOT DIP GALVANIZING AVAILABLE ON ALL MODELS

Dump Trailer Specifications	Deck Length	Deck Construction	Trailer Weight (Approx.)	Box Capacity	Deck Height (loaded)	Wheels & Tires	Cylinder / Hoist	Dump Angle (loaded)	Dump Gate	Jack	GVWR (lbs.)
DT SERIES											
FT-6 DT	8'	10 ga. steel w/ 20" high 12 ga. sides	2,500 lbs. / 1,133 kg.	2.5 yds. 498 gal.	21"	ST235/80R16 E, 8 bolt	Single Hydraulic Cyl.	45°	Double-Acting Spreader Gate	7K	7,000 lbs.
FT-10 DT	10'	10 ga. steel w/ 20" high 12 ga. sides	2,980 lbs. / 1,351 kg.	4.1 yds. 831 gal.	22"	ST225/75R15 D, 6 bolt	Single Hyd. Cyl. (14' length - twin Cylinders)	45°	Double-Acting Spreader Gate	7K	9,800 lbs. *
DT-HD SERIES (HEAVY DUTY)											
FT-12 DT HD	12'	10 ga. steel w/ 20" high 12 ga. sides	3,900 lbs. / 1,769 kg.	4.9 yds. 997 gal.	22"	ST235/80R16 E, 8 bolt	HD 10 Ton Scissor Hoist	45°	Double Rear Swing-Out Doors	12K	15,900 lbs.
FT-14 DT HD	12"	10 ga. steel w/ 20" high 12 ga. sides	4,200 lbs. / 1,905 kg.	4.9 yds. 997 gal.	22"	ST235/80R16 E, 8 bolt	HD 10 Ton Scissor Hoist, 14' & 16' HD 15 Ton Scissor Hoist	45°	Double Rear Swing-Out Doors	12K	18,200 lbs.
FT-16 DT HD	12'	7 ga. steel w/ 20" high 10 ga. sides	4,800 lbs. / 2,177 kg.	4.9 yds. 997 gal.	24"	215/75R17.5 H, 8 bolt	HD 15 Ton Scissor Hoist	45°	Double Rear Swing-Out Doors	12K	20,800 lbs.
DT-DO SERIES (DECK-OVER)											
FT-12-2 DT	12'	10 ga. steel w/ 20" high 12 ga. sides	4,000 lbs. / 1,814 kg.	4.9 yds. 997 gal.	36"	ST235/80R16 E, 8 bolt	HD 10 Ton Scissor Hoist	45°	Double-Acting Spreader Gate	12K	16,000 lbs.
FT-14-2 DT	12'	10 ga. steel w/ 20" high 12 ga. sides	4,400 lbs. / 1,995 kg.	4.9 yds. 997 gal.	36"	ST235/80R16 E, 8 bolt	HD 10 Ton Scissor Hoist, HD 15 Ton Scissor Hoist 14' & 16'	45°	Double-Acting Spreader Gate	12K	18,400 lbs.
FT-16-2 DT	14'	7 ga. steel w/ 20" high 10 ga. sides	5,300 lbs. / 2,404 kg.	5.8 yds. 1,163 gal.	38"	215/75R17.5 H, 8 bolt	HD 15 Ton Scissor Hoist	45°	Double-Acting Spreader Gate	12K	21,300 lbs.
FT-20-2 DT	14'	Contractor Body w/14" high hinged sides	5,900 lbs. / 2,676 kg.	4.0 yds. 814 gal.	38"	ST235/80R16 E, 8 bolt	HD 20 Ton Scissor Hoist	45°	Double-Acting Spreader Gate	12K	25,900 lbs.
FT-24-2 DT	14'	Contractor Body w/14" high hinged sides	7,400 lbs. / 3,356 kg.	4.0 yds. 814 gal.	38"	ST235/80R16 E, 8 bolt	HD 20 Ton Scissor Hoist	45°	Double-Acting Spreader Gate	12K	31,400 lbs.
FT-30-2 DT	14'	Contractor Body w/14" high hinged sides	8,000 lbs. / 3,628 kg.	4.0 yds. 814 gal.	40"	215/75R17.5, 8 bolt	HD 20 Ton Scissor Hoist	45°	Double-Acting Spreader Gate	12K	38,000 lbs.
E SD SERIES (SIDE DUMP) DUMP BOX 5' x 8'											
FT-12 E SD	14'	10 ga. steel w/16" high 12 ga. sides	3,500 lbs. / 1,587 kg.	2.0 yds. 399 gal.	24"	ST235/80R16 E, 8 bolt	Single Hyd. Cylinder	45°	Double-Acting Spreader Gate	12K	15,500 lbs.
FT-14 E SD	14'	10 ga. steel w/16" high 12 ga. sides	4,000 lbs. / 1,814 kg.	2.0 yds. 399 gal.	24"	ST235/80R16 E, 8 bolt	Single Hyd. Cylinder	45°	Double-Acting Spreader Gate	12K	18,000 lbs.
FT-16 E SD	18'	10 ga. steel w/16" high 12 ga. sides	4,000 lbs. / 1,814 kg.	2.0 yds. 399 gal.	24"	215/75R17.5, 8 bolt	Single Hyd. Cylinder	45°	Double-Acting Spreader Gate	12K	20,000 lbs.

* FT-10 DT - GVWR of 12,980 with conspicuity tape option

** Additional lengths available • Measurements are approximate • Some models may be shown with optional equipment • All specifications are subject to change

To learn more about us, have us mail you a specific full color brochure, or locate our nearest Felling Dealer, go to www.felling.com or give us a call at **1-800-245-2809**.



Your **FELLING TRAILERS** Dealer:

FELLING TRAILERS

Manufactured & Distributed by: **Felling Trailers, Inc.**
1525 Main St. S. • Sauk Centre, MN 56378
(320) 352-5239 • (320) 352-5230 FAX

Visit us online at **www.felling.com**

E-mail us at: **trailers@felling.com**

Call 1-800-245-2809

for your nearest dealer.

