

FELLING TRAILERS

CONSTRUCTION SEMI LINES

MX & NN (NARROW NECK)



FT-80-3 MX-L
38292



FT-70-2 NN-L
31820



The **FELLING** Style
Quality ~ Craftsmanship ~ Pride



CNS-101

Since 1974


MX SERIES



Model Shown Above - FT-70-2 MX-L
35494

MX-L (Low) & MX-H (High)

This model line is ideal for carrying the heavy loads from the shop to the construction site. Each trailer is configured to meet your hauling needs. With a large array of options available, there is no doubt that **WE BUILD IT YOUR WAY.**

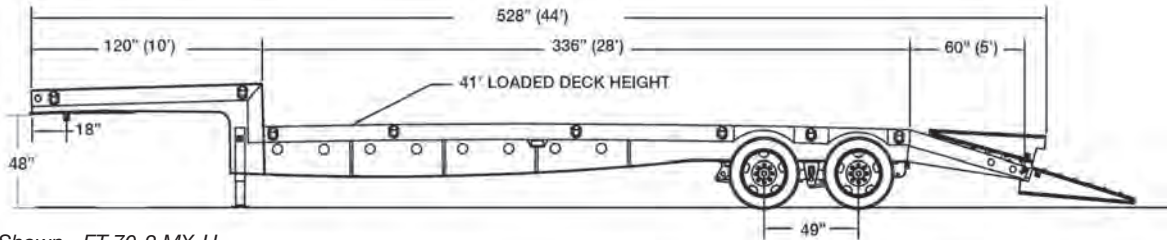

Model Shown - FT-70-2 MX-H

Model	FT-70-2 MX-L/H	FT-80-2 MX-L/H	FT-80-3 MX L/H	FT-100-3 MX-L/H
GVWR	82,500 lbs. (37,421 kg.)	92,800 lbs. (42,093 kg.)	95,900 lbs. (43,499 kg.)	117,300 lbs. (53,206 kg.)
Approx. Weight (Empty)	12,500 lbs. (5,669 kg.)	12,800 lbs. (5,805 kg.)	15,900 lbs. (7,212 kg.)	17,300 lbs. (7,847 kg.)
Load Capacity (Dist.)	70,000 lbs. (31,751 kg.)	80,000 lbs. (36,287 kg.)	80,000 lbs. (36,287 kg.)	100,000 lbs. (45,359 kg.)
Net Frame Cap. 10'	45,000 lbs. (20,411 kg.)	52,000 lbs. (23,586 kg.)	52,000 lbs. (23,586 kg.)	65,000 lbs. (29,483 kg.)
Deck Height (Loaded)	L - 35" (88.9 cm.) H - 41" (104 cm.)	L - 35" (88.9 cm.) H - 41" (104 cm.)	L - 35" (88.9 cm.) H - 41" (104 cm.)	L - 35" (88.9 cm.) H - 41" (104 cm.)
Deck Length (Main Deck)	28' (8.53 m.) 38' Overall (11.58 m.)	28' (8.53 m.) 38' Overall (11.58 m.)	28' (8.53 m.) 38' Overall (11.58 m.)	28' (8.53 m.) 38' Overall (11.58 m.)
Deck Width	102" (2.59 m.)	102" (2.59 m.)	102" (2.59 m.)	102" (2.59 m.)
Deck Material	2" White Oak Nominal	2" White Oak Nominal	2" White Oak Nominal	2" White Oak Nominal
Beaver tail	5' (1.5 m.) Self Cleaning Angle Iron	5' (1.5 m.) Self Cleaning Angle Iron	5' (1.5 m.) Self Cleaning Angle Iron	5' (1.5 m.) Self Cleaning Angle Iron
Ramps	5' (1.5 m.) x 20" (50 cm.) Self Cleaning Angle Iron Spring Assist	5' (1.5 m.) x 20" (50 cm.) Self Cleaning Angle Iron Spring Assist	5' (1.5 m.) x 20" (50 cm.) Self Cleaning Angle Iron Spring Assist	5' (1.5 m.) x 20" (50 cm.) Self Cleaning Angle Iron Spring Assist
Upper Deck	90° 10' Deck (3.04 m.)	90° 10' Deck (3.04 m.)	90° 10' Deck (3.04 m.)	90° 10' Deck (3.04 m.)
King Pin Setback/ Height	18" (45.72 cm.) 48" (121 cm.)	18" (45.72 cm.) 48" (121 cm.)	18" (45.72 cm.) 48" (121 cm.)	18" (45.72 cm.) 48" (121 cm.)
Swing Clearance	84" (213 cm.)	84" (213 cm.)	84" (213 cm.)	84" (213 cm.)
Main Frame	Engineered, Cambered, Fabricated Main Beams	Engineered, Cambered, Fabricated Main Beams	Engineered, Cambered, Fabricated Main Beams	Engineered, Cambered, Fabricated Main Beams
Crossmembers	Pierced 6" Jr. I-Beam on 16" Centers	Pierced 6" Jr. I-Beam on 16" Centers	Pierced 6" Jr. I-Beam on 16" Centers	Pierced 6" Jr. I-Beam on 16" Centers
Jack	200,000 lb. Twin 2 - Speed Holland Mark V	200,000 lb. Twin 2 - Speed Holland Mark V	200,000 lb. Twin 2 - Speed Holland Mark V	200,000 lb. Twin 2 - Speed Holland Mark V
Tie Downs	(16) D-Rings	(16) D-Rings	(16) D-Rings	(16) D-Rings
Axle Capacity	(2) 25K Meritor Oil Bath	(2) 25K Meritor Oil Bath	(3) 25K Meritor Oil Bath	(3) 25K Meritor Oil Bath
Suspension	49" Spread, 9700 Hutch (Spring)	49" Spread, 9700 Hutch (Spring)	49" Spread, 9700 Hutch (Spring)	49" Spread, 9700 Hutch (Spring)
Brakes	Air, ABS 2S/1M	Air, ABS 2S/1M	Air, ABS 2S/1M	Air, ABS 2S/1M
Tires/Wheels	L - (8) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (8) 255/70R 22.5 H, 10 Bolt Hub Pilot	L - (8) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (8) 255/70R 22.5 H, 10 Bolt Hub Pilot	L - (12) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (12) 255/70R 22.5 H, 10 Bolt Hub Pilot	L - (12) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (12) 255/70R 22.5 H, 10 Bolt Hub Pilot
Electrical DOT/SAE Approved	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights
Paint - 3 Year Warranty	Completed trailer is fully grit-blasted for superior paint adhesion, primed with 2-coats of a rust prohibitive primer, and then painted with 3-coats of high gloss urethane topcoat, electrostatically applied.			

Measurements are approximate • Some models may be shown with optional equipment • All specifications are subject to change.

STANDARD FEATURES:

- 5' Self Cleaning Angle Iron Beaver tail
- 5' x 20" Self Cleaning Angle Iron Spring Assist Ramps
- 48" King Pin Height
- 8" Structural Channel Side Rails
- Pierced 6" I-Beam Crossmembers on 16" Centers
- Tread Plate Covered Wheels
- Heavy, Robust Design



NN SERIES




Model Shown Above - FT-70-2 NN-L
56540LAE

Narrow Neck (NN)

This model line is the economical answer to your hauling needs. This classic style trailer fits the bill.

WE BUILD IT YOUR WAY.

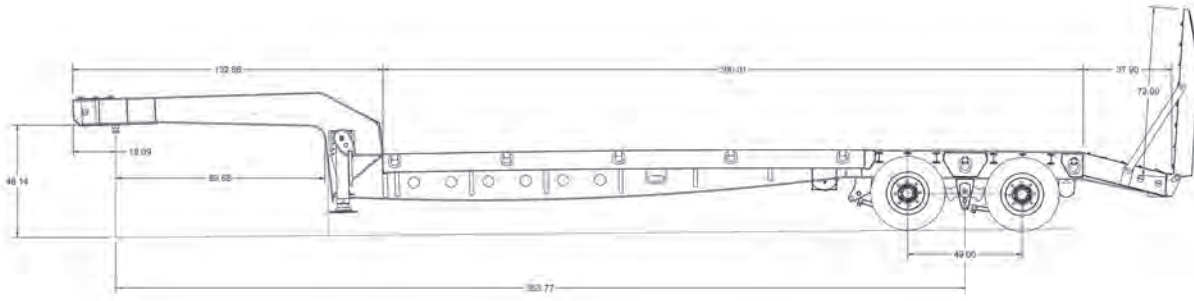

Model Shown - FT-70-2 NN-L

Model	FT-70-2 NN-L/H	FT-80-3 NN-L/H	FT-100-3 NN-L/H
GVWR	85,000 lbs. (38,555 kg.)	92,500 lbs. (41,957 kg.)	113,500 lbs. (51,482 kg.)
Approx. Weight (Empty)	10,500 lbs. (4,762 kg.)	12,500 lbs. (5,669 kg.)	13,500 lbs. (6,123 kg.)
Load Capacity (Dist.)	70,000 lbs. (31,751 kg.)	80,000 lbs. (36,287 kg.)	100,000 lbs. (45,359 kg.)
Net Frame Cap. 16'	52,500 lbs. (23,813 kg.)	60,000 lbs. (27,215 kg.)	75,000 lbs. (34,019 kg.)
Deck Height (Loaded)	L - 33" (83.2cm.) / H - 38" (96.52 cm.)	L - 33" (83.2cm.) / H - 38" (96.52 cm.)	L - 33" (83.2cm.) / H - 38" (96.52 cm.)
Deck Length	33' + 3' Beaver tail (10.97 m.)	38' + 3' Beaver tail (12.49 m.)	38' + 3' Beaver tail (12.49 m.)
Deck Width	102" (2.59 m.)	102" (2.59 m.)	102" (2.59 m.)
Deck Material	White Oak 2" Nominal	White Oak 2" Nominal	White Oak 2" Nominal
Beaver tail	3' (91 cm.) Self Cleaning Angle Iron	3' (91 cm.) Self Cleaning Angle Iron	3' (91 cm.) Self Cleaning Angle Iron
Ramps	24" x 72" Upright Self-Cleaning with Spring Assist	24" x 72" Upright Self-Cleaning with Spring Assist	24" x 72" Upright Self-Cleaning with Spring Assist
King Pin Setback/ Height	18" (45.72 cm.) / 48" (121 cm.)	18" (45.72 cm.) / 48" (121 cm.)	18" (45.72 cm.) / 48" (121 cm.)
Swing Clearance	84" (213 cm.)	84" (213 cm.)	84" (213 cm.)
Main Frame	Engineered, Cambered, Fabricated Main Beams	Engineered, Cambered, Fabricated Main Beams	Engineered, Cambered, Fabricated Main Beams
Crossmembers	Pierced 6" Jr. I-Beam on 16" Centers	Pierced 6" Jr. I-Beam on 16" Centers	Pierced 6" Jr. I-Beam on 16" Centers
Jack	200,000 lb. Twin 2 - Speed Holland Mark V	200,000 lb. Twin 2 - Speed Holland Mark V	200,000 lb. Twin 2 - Speed Holland Mark V
Tie Downs	(14) Bent D-Rings	(14) Bent D-Rings	(14) Bent D-Rings
Axle Capacity	(2) 25K Meritor Oil Bath	(3) 25K Meritor Oil Bath	(3) 25K Meritor Oil Bath
Suspension	49" Spread, 9700 Hutch	49" Spread, 9700 Hutch	49" Spread, 9700 Hutch
Brakes	Air, ABS 2S/1M	Air, ABS 2S/1M	Air, ABS 2S/1M
Tires/Wheels	L - (8) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (8) 255/70R 22.5 H, 10 Bolt Hub Pilot	L - (12) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (12) 255/70R 22.5 H, 10 Bolt Hub Pilot	L - (12) 235/75R 17.5 H, 8 Bolt Hub Pilot H - (12) 255/70R 22.5 H, 10 Bolt Hub Pilot
Electrical DOT/SAE Approved	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights	LED Sealed Beam Lights, Sealed Wiring Harness, Mid-Ship Turn / Marker Lights
Paint - 3 Year Warranty	Completed trailer is fully grit-blasted for superior paint adhesion, primed with 2-coats of a rust prohibitive primer, and then painted with 3-coats of high gloss urethane topcoat, electrostatically applied.		

STANDARD FEATURES:

- **Narrow Neck Design - 84" Swing Clearance**
- **48" King Pin Height**
- **10" Structural Channel Side Rails**
- **Pierced 6" I-Beam Crossmembers on 16" Centers**
- **Open Wheel Wells**
- **3' Self Cleaning Angle Iron Beaver tail**



Measurements are approximate • Some models may be shown with optional equipment • All specifications are subject to change.

BUILT YOUR WAY.



TSA - Tilt Slide Axle

Payload capacities ranging from 70,000 lbs. to 100,000 lbs. For detailed information, please see the TSA brochure TSA-100.



FT-80-3 TSA
41663



Perimeter Frame - Hydraulic Tail

Payload capacities ranging from 70,000 lbs. to 100,000 lbs. For detailed information, please see the Perimeter Frame Hydraulic Tail brochure HT-102.



FT-70-2 PH-HT
41266



Hydraulic Detachable Gooseneck "The Industry's Most User-Friendly Detach"

Payload capacities ranging from 70,000 lbs. to 120,000 lbs. For detailed information, please see the X-Force brochure XF-102.



XF-AG-100-3 HDG AG Package
41046NTU



39123NTU, 3652NTU, 39124NTU XF-HD-120-3 HDG w/ XF-Jeep 80-3 & XF-Stinger

To learn more about us, have us mail you a specific full color brochure, or locate our nearest **Felling Dealer**, go to www.felling.com or give us a call at **1-800-245-2809**.

Your **FELLING TRAILERS** Dealer:

FELLING TRAILERS

Manufactured & Distributed by: **Felling Trailers, Inc.**
1525 Main St. S. • Sauk Centre, MN 56378
(320) 352-5239 • (320) 352-5230 FAX

Visit us online at www.felling.com
E-mail us at: trailers@felling.com

Call 1-800-245-2809 for your nearest dealer.

©2016 Felling Trailers, Inc. Form No. CNS-101 2/16 Printed in U.S.A.

Join Us Online

