


FELLING TRAILERS


Deck-Over Trailers ~ Ramp Options

FT-40-2



- GVWR: 45,520 lbs. (20,647 kg.)
- GAWR 36,320 lbs. with 215/75R 17.5 Tires
(235/75R 17.5 Tires Increases GAWR to 40,000 lbs.)
- Main Beam: 10" H-Beam
- Crossmembers: 4" Stacked Jr. I-Beams,
Approximately 18" to 20" on Center
- Side Rails: 7" Channel Turned Out
- Deck Height (approximate): 35" Loaded, 37" Unloaded


FT-40-2 LP (Low Profile)




- GVWR: 45,520 lbs. (20,647 kg.)
- GAWR 36,320 lbs. with 215/75R 17.5 Tires
(235/75R 17.5 Tires Increases GAWR to 40,000 lbs.)
- Main Beam: Engineered, Cambered, Fabricated,
14" Beams
- Crossmembers: 4" Pierced Jr. I-Beams, 16" on Center
- Side Rails: 7" Channel Turned In (Flat Side Out)
- Deck Height (approximate): 33" Loaded, 35" Unloaded
- Treadplate Covered Wheels

RAMP OPTIONS


5' Beavertail w / 5' Flip-Over Ramp *Standard

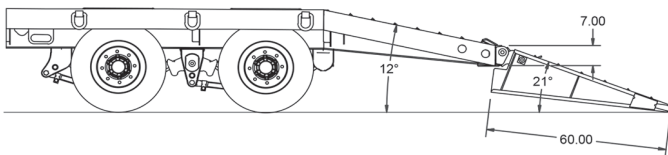


6' Double Incline Beavertail w / 6' Flip-Over Ramp

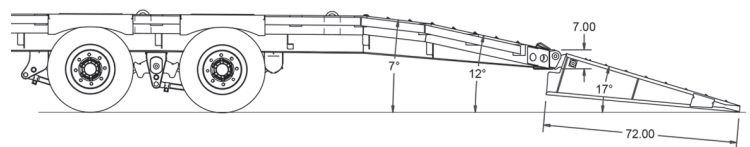


5' Beavertail w / 6' Air Ramp

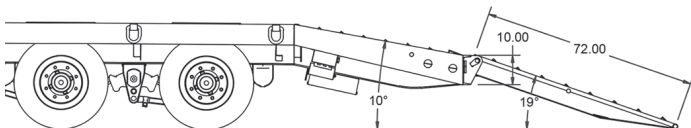

6' Double Incline Beavertail w / 6' Air Ramp

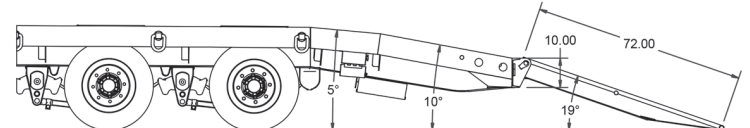

6' Beavertail w / 6' Flip-Over Ramp

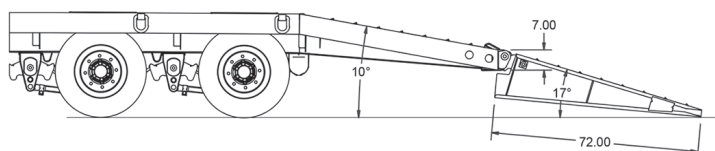

6' Double Incline Beavertail w / 6' + 5' Bi-Fold Ramp

