
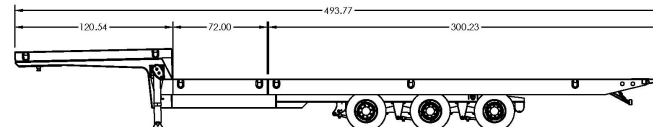


<b>FT-70-3 RGT-L</b>		<b>Rigid Neck Tilt Semi</b>	
<b>GVWR LBS: 86,600</b>	<b>GAWR LBS: 67,500</b>	<b>WEIGHT LBS: 16,600</b>	<b>CAPACITY LBS: 70,000</b>

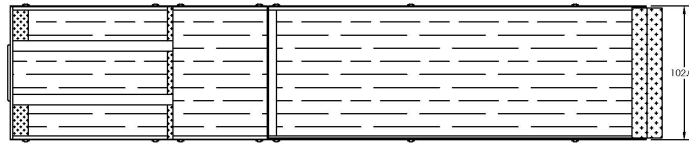

Feature Name	Standard Features	Std. Qty	UOM
Model	<b>FT-70-3 RGT-L</b>	1	
Load Capacity	70,000 lbs Distributed	1	Std
Upper Deck	90° Neck	10	Feet
Deck Length	Add Tilt Deck Length (Includes Approx. 12" Approach Plate)	25	Feet
Deck Type	White Oak 2" Nom	1	Std
Stationary Deck Type	White Oak 2" Nom	1	Std
Stationary Deck	Stationary Deck	6	Feet
Appx Deck Height	59" Upper Deck, 36" Lower Deck, Loaded	1	Inches
Width	102" OD	41	Feet
Tie Downs	D-Rings, 1" ** Bent **	14	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	1	Std
Axles	25K Oil Bath	3	Std
Suspension	25,000 lb Heavy Duty 3 leaf springs, for Hutch 9700	3	Std
Suspension	49" Spread (Spring), 9700 Hutch	1	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot	12	Each
Hitch Type	Semi King Pin [S] with 18" Setback, 48" Height	1	Std
Jack	200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity)	1	Std
Plug	7 Pole Semi Socket	1	Std
Lights	LED Lights (Peterson), (3) lights per side, (2) per side Tailboard, Sealed Wiring Harness (Sealco)	1	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	1	Std
Stripe Color	White	1	Std
Standard	Document Holder	1	Std
Standard	Locking Tilt Valve	1	Std
Standard	Chain Boxes in Front Corners of Upper Deck, Lockable	2	Each
Standard	Air bag assist tilt (up only)	1	Std
Standard	Air operated lock Mechanism	1	Std
Standard	Dual Self Actuating Hydraulic Cushion Cylinders	2	Std
GVWR	86,600 lbs	1	Std