


### XF-110-3 HDG-L

### X-Force Series

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
<b>129,000</b>	<b>60,840</b>	<b>20,000</b>	<b>109,000</b>
<ul style="list-style-type: none"> <li>GVWR:129,000 lbs,</li> <li>Appx Empty Weight 19,000 lbs</li> <li>Load Capacity: 110,000 lbs in 16 ft</li> <li>King Pin height adjustable 45"- 52" (96" SC)</li> <li>16" King Pin Set Back</li> <li>Removable Outriggers</li> <li>Drop In Tool Tray</li> <li>7" Lift Cylinders (2)</li> <li>5 Position Ride Height Cam Blocks</li> <li>Rear Bolsters with Swivel D-rings</li> </ul>		<ul style="list-style-type: none"> <li>Engineered, Cambered, Fabricated 13.5" Main Beams and Side Beams, with T-1 Flanges</li> <li>8" I-Beam crossmembers on 24" centers</li> <li>Drop Center Cross Members in Rear Trunnion</li> <li>Document Holder Standard</li> <li>4 Flag Holders</li> <li>Mid-Ship Turn/Marker Lights</li> <li>Flip Axle Ready</li> <li>Hyd Couplers, 3/4" Pioneer, Male 6602-12-12, Female 6601-12-12</li> <li>Pressure requirements, 3,000 PSI</li> </ul> <p>* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated &amp; remitted by dealer.</p>	

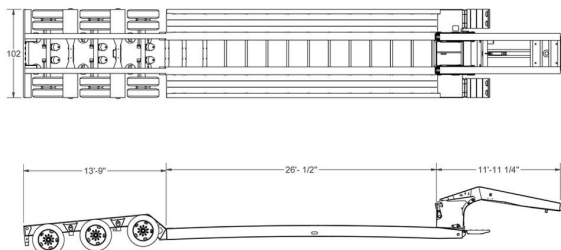

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	110,000 lbs in 16 ft	X	1.00	Std
Gooseneck	12' Hydraulic Detachable Gooseneck 96" Swing Clearance	X	12.00	Feet
Gooseneck, Acc	5 Position Ride Height Cam Blocks	X	1.00	Std
Gooseneck, Acc	Hydraulic Pressure Gauge, Liquid Filled, for supply line pressure	X	1.00	Opt
Gooseneck, Acc	Hydraulically Operated Center Neck Support Arm	X	1.00	Std
Ramps, Front	26" Front Fold Over Ramps	X	1.00	Pair
Deck Length	Main Deck Length (Usable Deck Length +/-)	X	24.00	Feet
Main Deck	Removable Swing Out Outriggers, 5,000 lb rating	X	1.00	Std
Trunnion Length	45° Appx, 10" Half Bolster Trunnion Approach	X	1.00	Feet
Trunnion Length	55" Axle Spread, Trunnion Length in Feet	X	13.00	Feet
Rear Deck & Trunnion	Flip Axle Ready, Plumbing and Brackets	X	1.00	Std
Deck Type	White Oak Full 2" (Outer Bays Only)	X	1.00	Std
Appx Deck Height	19.5" Loaded, 6" Ground Clearance	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1"	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	Ridewell 240 with Dump Valve & Pressure Gauge	X	1.00	Std



## FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809 - [www.felling.com](http://www.felling.com)

## Product Sheet

4500-A

Tires & Wheels	255/70R 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot	X	12.00	Std
Hitch Type	Semi King Pin [S] with 16" Setback, 50" Height +/-	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (1) per side Gooseneck, (3) lights per side Deck & Trunnion, (3) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Drop In Storage Tray in Main Deck (1 Standard)	X	1.00	Std
Standard	Plumbed for Wet Kit with Hyd Couplers, Pressure- 3/4" Pioneer, Male 6602-12-12, Ret urn- 3/4" Pioneer Female 6601-12-12 ** 3,000 PSI Required **	X	1.00	Std
GVWR	129,000 lbs	X	1.00	Std