



ISO 9001 Quality Management System | WBENC-Certified WBE | THE TRAILER EXPERTS - SINCE 1974

Product Sheet

Felling Trailers, Inc. 2021

www.felling.com • 1-800-245-2809

1525 Main Street South

Sauk Centre, MN 56378

FT-20-2 LP



Deck Over Low Pro

GVWR LBS: 25,900

GAWR LBS: 20,000

WEIGHT LBS: 6,620

CAPACITY LBS: 19,280

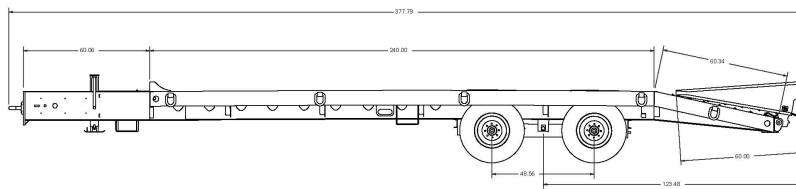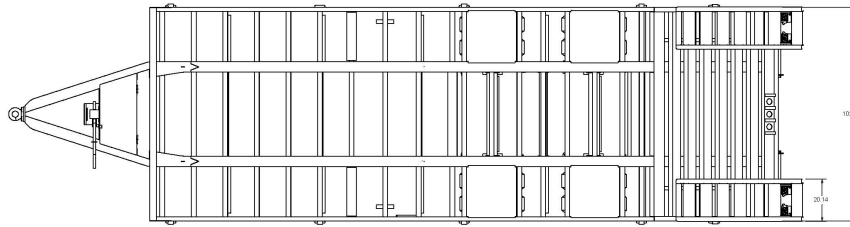

Feature Name	Standard Features	Std. Qty	UOM
Model	FT-20-2 LP	1	
Frame Type	Engineered Fabricated High Tensile Main Frame Beams With Pierced Junior I-Beams Crossmembers	1	Std
Deck Length	Add Deck Length	20	Feet
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	5	Feet
Ramps; Rear	5' x 20" Self Cleaning 5" X 3" Angle Iron Spring Assist	1	Pair
Deck Type	White Oak 2" Nom	1	Std
Appx Deck Height	33" Loaded, 35" Unloaded	1	Inches
Width	102" OD	25	Feet
Tie Downs	D-Rings, 1" ** Straight ** (One Set Centered on BVT)	10	Each
Brakes	Electric, FSA (Fwd Self Adj) On All Axles	1	Std
Axles	10K Oil Bath	2	Std
Suspension	Spring	1	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] Hub Pilot	8	Std
Hitch Length	Center of Coupler to Headboard, Appx	5.3	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 66,000 lb Plate Mount (3/4" Bolt)	1	Std
Jack	12K w/ Spring Loaded Drop Leg, Side Wind	1	Std
Plug	7 Pole RV	1	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	1	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	1	Std
Stripe Color	White	1	Std
Standard	Document Holder	1	Std
Standard	Toolbox, with Lockable Cover	1	Std
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	2	Std
Standard	3/8" Safety Chains, Grade 70	1	Std
GVWR	25,900 lbs	1	Std