



ISO 9001 Quality Management System | WBENC-Certified WBE | THE TRAILER EXPERTS - SINCE 1974

**Product Sheet**

Felling Trailers, Inc. 2021

www.felling.com • 1-800-245-2809

1525 Main Street South

Sauk Centre, MN 56378


**FT-12 EZ-T Drop Deck EZ-Tilt Series**

**GVWR LBS: 13,800**

**GAWR LBS: 14,000**

**WEIGHT LBS: 3,500**

**CAPACITY LBS: 10,300**

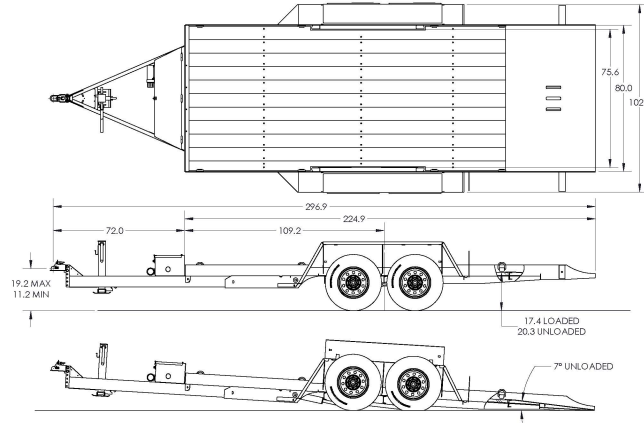

Feature Name	Standard Features	Std. Qty	UOM
<b>Model</b>	<b>FT-12 EZ-T</b>	1	
<b>Deck Length</b>	Tilt Deck Length (15' deck + 3.5' Smooth Steel Approach)	18.5	Feet
<b>Deck Type</b>	Anti-Skid Paint Applied to Approach plate	1	Std
<b>Deck Type</b>	Pressure Treated Wood	1	Std
<b>Appx Deck Height</b>	20.5" Unloaded	1	Inches
<b>Width</b>	102" OD, 75.5" ID (Between axle mounts)	1	Std
<b>Tie Downs</b>	D-Rings, 5/8" Straight	8	Each
<b>Brakes</b>	Electric, FSA (Fwd Self Adj) On All Axles	1	Std
<b>Axles</b>	7K Drop	2	Std
<b>Axles, Acc</b>	Super Lube Hubs	2	Std
<b>Suspension</b>	Rotating, Torsion	1	Std
<b>Tires &amp; Wheels</b>	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	4	Std
<b>Hitch Type</b>	2 5/16" Ball Adjustable, [B] 20,000 lb Channel Mount, Range 15.5" to 23.5"	1	Std
<b>Hitch Height</b>	Approximate Adjustment Hitch Range 11.2" to 19.5"	1	Std
<b>Hitch Length</b>	Center of Coupler to Headboard, Appx	6	Feet
<b>Jack</b>	12K w/ Spring Loaded Drop Leg, Side Wind	1	Std
<b>Plug</b>	7 Pole RV	1	Std
<b>Lights</b>	LED, 4 tail light system, Sealed Wiring Harness	1	Std
<b>Trailer Color</b>	Felling Black # CCA945378 (White Felling Decal)	1	Std
<b>Standard</b>	Elec/Hydraulic Pump with Corded Remote and 12 V Battery in Lockable Enclosure	1	Std
<b>Standard</b>	3/8" Safety Chains, Grade 70	1	Std
<b>Standard</b>	Document Holder	1	Std
<b>GVWR</b>	13,800 lbs	1	Std