


<b>FT-60-4 LP HD</b>		<b>Low Pro HD</b>	
<b>GVWR LBS: 74,000</b>	<b>GAWR LBS: 18,160</b>	<b>WEIGHT LBS: 14,000</b>	<b>CAPACITY LBS: 60,000</b>

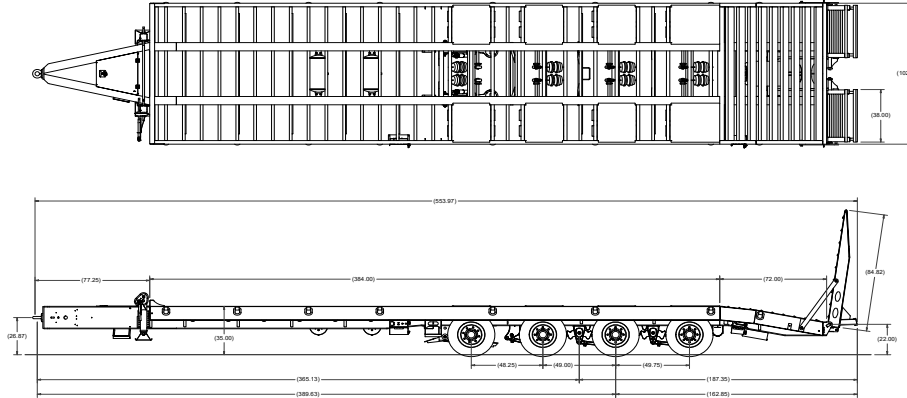

Feature Name	Standard Features	Std. Qty	UOM
<b>Model</b>	<b>FT-60-4 LP HD</b>	1	
Deck Length	Add Deck Length	0	Feet
Deck Type	Apitong, 1 3/8"	0	Std
Frame Type	Channel Side Rails turned out	0	Std
Frame Type	10" Channel Side Rail	0	Std
Frame Type	Engineered Fabricated Hi-Tensile Grade 80 Main Frame Beams with Grade 80 Jr-I Cross-Members	0	Std
Frame Type	Crossmembers 12" on center	0	Std
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	0	Feet
Beavertail, Acc	Double Incline	0	Std
Ramps; Rear	6' x 20" Self Cleaning 5" X 3" Angle Iron, Spring Assist	0	Pair
Appx Deck Height	33" Loaded, 35" Unloaded	0	Inches
Width	102" OD	0	Feet
Tie Downs	D-Rings, 1" ** Bent **	0	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	0	Std
Axles	25K Oil Bath	0	Std
Suspension	25,000 lb Heavy Duty 3 leaf springs, for Hutch 9700	0	Std
Suspension	49" Spread (Spring), 9700 Hutch	0	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot	0	Std
Hitch Length	Center of Coupler to Headboard, Appx	0	Feet
Hitch Type	3" Adjustable 90K Pintle [C] (7/8" Gr 8 Bolts)	0	Std
Jack	140,000 lb Twin 2 Speed (39,000 lb Lift Capacity)	0	Pair